

MEASURING GUIDE

CAUTION!



This is not a safety screen and this product will not stop a child from falling. Use eye protection when cutting and installing your screen.

TOOLS:

Measuring Tape
Phillips Screwdriver
Soft Mallet
Drill with Assorted Bits
Utility Knife
Needle Nose Pliers
Pencil
Power Miter/Chop Saw
(Hacksaw Will Also Suffice)

1 Installation Methods

Single Screen Installation: Install the Screen Cassette on either the right or left side.

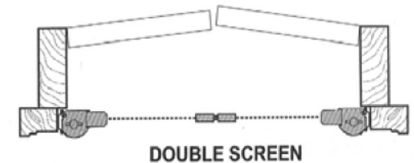


Double Screen Installation: Install both a right and a left Screen Cassette with one configured as the active screen and the other as the passive screen.

2 Mounting Styles

Inside Mounting the Screen: A common installation method involves mounting the Screen Cassette using Recess Mounting Clips inset within the doorjamb area.

Outside Mounting the Screen: Flush mounting the screen using Surface Mount Clips (see Section B – “Surface Mounting Instructions”).




3 Measuring For Your Screen

Begin by identifying the area where the screen will be mounted. Measure the opening width and height in several places – see illustration. Record the SMALLEST width and height measurement.



Subtract the appropriate dimension as indicated in the adjusted measurement column below. Use the adjusted measurement dimensions to cut the parts.

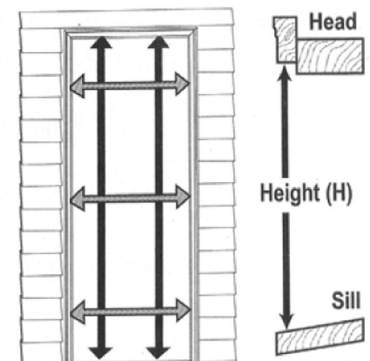

SINGLE DOORS:

COMPONENT	OPENING SIZE
Cassette	Height
Side Profile	Height
Top Guide Rail	Width
Bottom Guide Rail	Width

DOUBLE DOORS:

COMPONENT	OPENING SIZE
Cassette	Height
Top Guide Rail	Width
Bottom Guide Rail	Width

Note: Single screens and double screens require different cutting deductions.

View On-Line Installation Video at

www.glidescreen.com

Technical Assistance Call 1-888-354-8320